





... that thoughtful luxury



The interior of the Vanden Plas 1500 is a triumph of good design—and naturally, it's totally luxurious. You'll find deep-pile wall-to-wall carpet underfoot—there to provide extra sound-proofing as much as for its sumptuous good looks. Those fully reclining front seats are fully adjustable fore-and-aft, and all the seats are upholstered in knit-backed expanded vinyl with fluted hide panels for the wearing surfaces. And of course, there are dual arm-rests for everyone.

You'll find a full luxury specification on the technical side, too. That renowned †Hydragas suspension will cushion you comfortably, even over indifferent roads. And the tried and tested 1485 cc overhead camshaft engine will power you smoothly and effortlessly up to 50 mph in approximately ten seconds—or return you around *39 mpg at a steady 50.

Luxury must include safety and in that respect the Vanden Plas 1500 is extremely well endowed. Just consider a few of the most desirable features; rack and pinion steering, safety steering column, servo-assisted brakes, hazard warning lamps and rectangular sealed beam headlamps supplemented by twin fog-lamps.

Naturally enough, the Vanden Plas 1500 is not lacking in those important extras and options. For instance, you can choose between a highly responsive 5-speed all-synchromesh gearbox or optional silk-smooth automatic transmission. And those surprisingly useful rear seat picnic tables are not extras—they're part of the whole value for money Vanden Plas 1500 package.


















Specifications

Dimensions

Engine: Four-cylinder, transverse, overhead valve with single overhead camshaft. Bore 3-00 in (76-2 mm); stroke 3-2 in (81-28 mm); capacity 1485 cm³ (91 in³). B.H.P. *68 at 5,500 rev/min; maximum torque *11-1 kgf m at 2,900 rev/min; compression ratio 9-0:1.

Fuel System: Mechanical fuel pump; single SU type HS6 carburetter; tank capacity 10·5 gallons (47·7 litres).

Cooling System: Closed pressurized system with expansion tank and thermostatically controlled, electrically operated fan. Capacity 11-5 pints (6-5 litres) including heater.

Clutch: Diaphragm spring 7-75 in (0-20 m) diameter.

Gearbox: Five speed, synchromesh on forward gears. Remote control gear-lever. Ratios: First 3:202:1; second 2:004:1; third 1:372:1; fourth 1:000:1; fifth 0:869:1; reverse 3:467:1.

Final Drive: Front-wheel drive, open shafts with constant velocity joints. Ratio 3:647:1.

Steering: Rack and pinion. Safety steering-column. Turning circle 33 ft 3 in (10·13 m) approximately.

Suspension: Independent with †Hydragas suspension units interconnected front to rear.

Brakes: Hydraulic, servo-assisted, 9-68 in (0-25 m) diameter discs at front, 8 in (0-20 m) diameter drums with leading/trailing shoes at rear.

Wheels and Tyres: Pressed steel disc wheels with 155-13 radial-ply tyres.

Electrical: 12 volt, 40 Ah battery. Alternator. Multi-purpose lever on right-hand of steering-column controls horn, headlamp flasher, dipswitch, and self-cancelling direction indicators. Lever on left-hand of steering-column controls electric windscreen washer and two-speed windscreen wipers with flick-wipe facility. Twin horns. Hazard warning lamps. Twin fog-lamps. Electrically heated rear window. Fresh air heater/demister with air blend and two-speed blower controls. Combined ignition/starter switch incorporates steering-column lock. Three courtesy lights, one on windscreen header rail and one on each rear quarter panel. Cigar lighter.


Instruments: Speedometer with distance recorder. Fuel, water temperature and battery condition gauges. Warning lamps to indicate low oil pressure, headlamp high beam, flashers working, no charge and hazard warning lamps working.

Coachwork: Four-door saloon of all-steel unitary construction with underbody protection and wax-injected body sills. Sill protectors. Trimmed rear parcel shelf. Full-width veneered walnut fascia board with instruments and face-level fresh air vents. Twin sun visors with vanity mirror on passenger's visor. Carpet over felt floor covering. Anti-burst door locks (incorporating child safety catch on rear doors) operated by recessed handles and door sill locking buttons on the inside; flush fitting handles on the outside. Arm-rests incorporating pulls on all doors. Ashtrays front and rear. Coat hooks. Seats trimmed in knit-backed expanded vinyl with fluted hide panels for seat wearing surfaces. Interior rear-view mirror, twin exterior door mounted mirrors. Interior bonnet release. Boot carpet. Front reclining seats with centre arm-rest. Rear bench-type seat with pull-down centre arm-rest. Picnic tables in rear of front seats. Crash pad surrounding fascia. Nylon cloth head lining. Stitched hand brake gaiter. Companion compartment mounted on each front door. Door trim pad in unique Vanden Plas style with sewn feature line, black padded cappings and walnut strip inserts. Lockable glovebox with veneered walnut lid. Additional sound deadening. Grab handles above rear windows. Boot light and courtesy switch. Hinged fuel filler lid with lockable cap. Provision is made for the installation of up to four radio speakers. Factory fitted front seat belts are supplied; anchorages are provided for the fitting of rear seat belts are supplied; anchorages are provided for the fitting of rear seat belts.

Optional Extras: Automatic transmission. Metallic paint. Radio with twin speakers. Head restraints.

				cm	in
*Front seat headroom (uncomp	ressed	03330	Λ	90-35	35.58
*Rear seat headroom (uncompre	essed)		В	78:30	30.84
*Front seat cushion depth			C	45.50	17-92
*Rear seat cushion depth.		China China	D	46-40	18.26
*Front seat squab height			E	54-80	21.58
			F	53.60	21-10
*Rear seat squab height	1 1		G	33-25	13-10
*Front seat cushion height	* *		H	36-00	14.18
*Rear seat cushion height	1.	max.	ī	48-75	19-18
*Distance between seats	1.1	min.	ì	24.85	9.78
*Distance between seats	4.4		J	42.75	16-84
*Steering wheel to squab	7.7	max.	J	20.35	8-01
*Steering wheel to squab	2.50	min.		15.85	6.25
*Steering wheel to cushion	++		K		47-47
*Front seat leg reach	17.50	max.	L	120.50	
*Front seat leg reach		min.	L	100.55	39.59
*Rear seat leg reach		max.	M	138-60	54.57
*Rear seat leg reach	1000	min.	M	114-15	44.94
Luggage boot height		4.1	N	55.88	22.00
Luggage boot depth			0	80.64	31.75
Luggage boot width with spare	whee	lace.	P	92.71	36.50
*Front seat cushion width			Q1	52.70	20.75
*Front cushions overall width			Q2	115.00	45-27
*Rear cushions overall width	4.1		R	130-80	51.50
*Width between front doors			S	130-90	51.54
*Width across rear seat	ora-	2000	T	130-80	51.50
*Shoulder width over front seat			U	130-80	51.50
*Shoulder width over rear seat			V	129-40	50.94
Wilessillesse			W	244-20	96-14
Overall height at kerb laden			X	139-05	54-75
			Ÿ	161-30	63-52
	* *		ż	391-80	154-25
Overall length	4.4		AA	71-25	28-03
Front door entry width			AB	69-25	27-24
Rear door entry width				138.00	54-33
Track front	4.4			138.20	54.41
Track rear	2.5	4.1	5.5	19-40	7.64
Ground clearance at kerb lade	n		1.5	19.40	7.04

* Due to trim variations between models, these are approximate measurements.

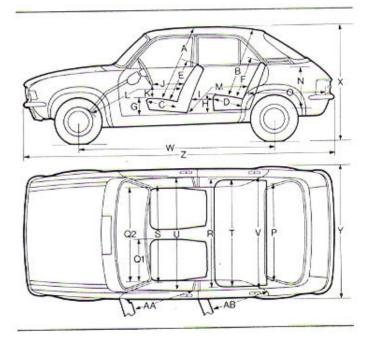

DIN 70020.

^{† &#}x27;Hydragas' is a registered Trade Mark,



Every new Leyland car has Supercover. It's the most comprehensive service ever offered by any car manufacturer.

At each and every stage in their production, cars are thoroughly examined by our experts and engineers.

In addition, the dealer puts each car through a long and extensive check.

So when you buy your new Leyland car you can be confident that everything possible has been done to ensure that it is in perfect condition.

Supercover is a very comprehensive package. But if you have any trouble whatsoever, no matter how small, you just contact your dealer. He'll do his best to keep your car in perfect condition.

If you're not 100% satisfied with the service you get, then we provide a special card with every car, which should be sent direct to the Managing Director of Leyland Cars, and he'll make sure the problem is solved quickly and efficiently.





British Leyland UK Limited Box 41, Longbridge, Birmingham B31 2TB

IMPORTANT NOTICE

British Leyland UK Limited is constantly seeking ways to improve the specification, design and production of its vehicles and alterations take place continually. While every effort is made to produce up-to-date literature, this brochure should not be regarded as an infallible guide to current specification, nor does it constitute an offer for the sale of any particular vehicle.

Distributors and Dealers are not agents of British Leyland UK Limited and have absolutely no authority to bind British Leyland UK Limited by any express or implied undertaking or representation.

... that look of distinction

The phrase 'good quality' has a distinctly old-flashioned ring—but there is a place for such a traditional expression in today's phrenetic, cost-conscious world. The quiet popularity enjoyed by the Vanden Plas 1500 is ample proof of that, and it's an intriguing exercise to discover why discerning motorists are so convinced of its sterling qualities.

To begin with, the Vanden Plas 1500 is totally international in concept. It would look equally at home in Rome or Paris

or Vienna—yet its distinctive air of good breeding is unmistakably British.

That remarkably compact exterior makes for supremely simple handling in city traffic, yet the interior is spacious enough to make touring a really relaxing affair.

enough to make touring a really relaxing allair.

Luxurious yet unostentatious, powerful yet economical, the Vanden Plas 1500 is truly a car for the discriminating motorist.

